


Composite Adhesive Tape

No.343B

1.Features

- Superior tracking resistance facilitates more compact transformer design
- UL-certified, flame retardant adhesive tape

2.Structure

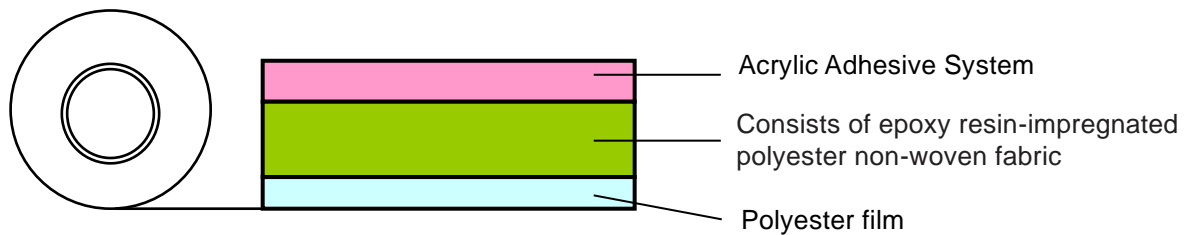

3.Applications

- Barrier Insulation of Transformers or Coils

4.Properties

Table 1.General Properties

Items	Unites	Values
Total Thickness	mm	0.42
Color	—	White
Adhesion Strength	N/19mm	17.0
Tensile Strength	N/19mm	205
Elongation	%	33
Breakdown Voltage	kV	8.0
Electrolytic Corrosion Coefficient	—	1.00
UL Temp. Class	°C	130
Flame Retardant	—	UL 510A FR
CTI Material Group	—	CTI PLC=0 E34833 (UL746A)

Contact : Nitto Shinko Corporation Customer Support Center E-Mail tsc-nsk@nitto.co.jp

NO.343B 1/1

5001-33499-260217_E

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.