Nitto

# Product Data Sheet

**Composite Adhesive Tape**

# No.354E-15

## 1.Features

- It has excellent electric insulation and electrolytic corrosion properties.
- It has excellent flame-retardant.

## 2.Construction

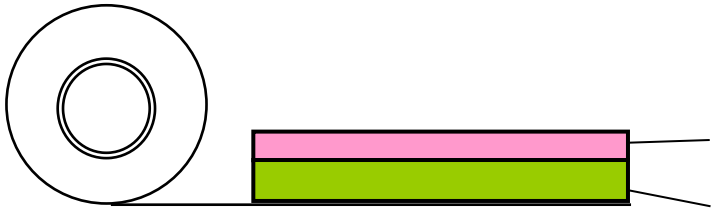


## 3.Applications

- For interlayer insulation and termination of transformers
- For outer insulation and termination of coils

## 4.Properties

Table1. General properties

| Items | Units | No.354E-15 |
|---|---|---|
| Total thickness | mm | 0.15 |
| Adhesion to steel | N/19mm | 6.4 |
| Tensile strength | N/19mm | 100 |
| Elongation | % | 17 |
| Breakdown voltage | kV | 8.5 |
| Electrolytic corrosion coefficient | — | 1.00 |

Contact : Nitto Shinko Corporation Customer Support Center E-Mail tsc-nsk@nitto.co.jp



**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.