


Polyester adhesive tape

NO.337

Features

- A film is thin and is superior in flexibility
- The plating liquid doesn't soak in the object, because an adhesive layer is thick

Structure

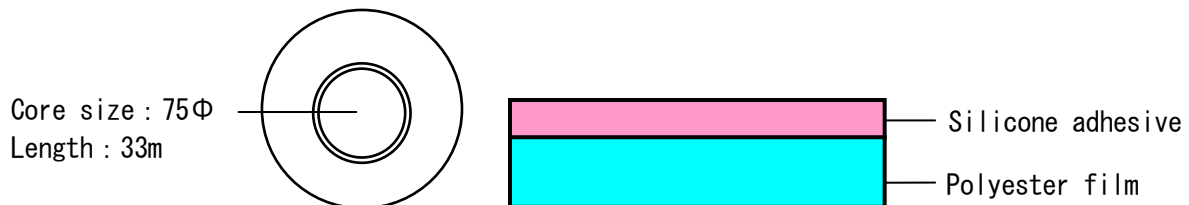

Applications

- Masking of heat resistance

Properties

Table 1. General Properties

Item	Unit	No. 337
Total Thickness (Backing)	mm	0.100 (0.025)
Color	—	Transparent, Blue
Peel adhesion	N/19mm	6.2
Substrate strength	MPa	130
Elongation	%	80
Breakdown Voltage	Kv	5.5
Electrolytic corrosion factor		1.00

- For inquiries ...Application Engineering Dept, Technical Support Center EYES Gr
E-mail : eyes@nitto.co.jp TEL : 81-48-571-3340 FAX : 81-48-571-3325

1/1
NO. 337_04E
2015. 7. 23

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.