Nitto
Innovation for Customers

Product Data Sheet

Polyester adhesive tape

NO.337

Features

- A film is thin and is superior in flexibility
- The plating liquid doesn't soak in the object, because an adhesive layer is thick

Structure

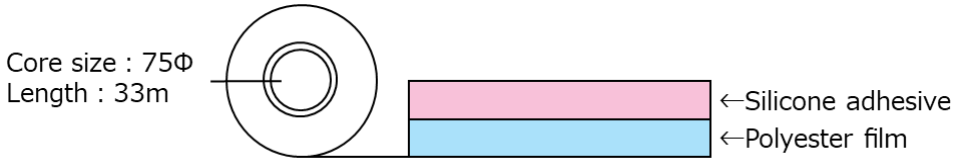

Fig.1 Structure

Applications

- Masking of heat resistance

Properties

Table.1 General properties

Property	Unit	Characteristic value
Total thickness (Backing)	mm	0.095 (0.025)
Color	-	Blue
Peel adhesion	N/19mm	8.6
Substrate strength	MPa	144
Elongation	%	80
Breakdown voltage	kV	5.5
Electrolytic corrosion factor	-	1.00

NO.337_07E
Jun.30.2025

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission.

Nitto Denko Corporation