


### Self-Fusing Silicone Rubber Tape

# No.660

#### 1.Features

- Excellent heat and weather resistance

#### 2.Construction

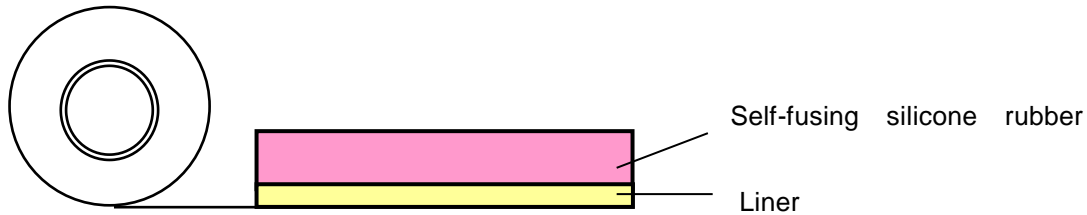

#### 3.Applications

- For protecting electric cable joint insulation

#### 4.Properties

Items	Unit	No.660	Test Method	
Thickness	mm	0.22	micrometer	
Length	m	15	-	
Tensile strength	MPa	8.2	Tensile Speed:200mm/min Sample:19mm width	
Elongation	%	660		
Breakdown voltage	kV/mm	56.5	Electrode: 12.5 mmØ Load: 4.90 N Pressure rising rate: 1 kV/sec	
Fusion Strength	N/19mm	28	Test pieces : overlap two (19 mm x Approx. 100 mm) by 50 mm Overlap Condition : 49N x 30min Tensile speed: 200 mm/min	
Holding rate after Heating	Tensile strength	%	95	Heating Condition : 200°Cx168Hrs Tensile Speed:200mm/min Sample:19mm width
	Elongation		61	

Contact : Nitto Shinko Corporation Customer Support Center E-Mail [tsc-nsk@nitto.co.jp](mailto:tsc-nsk@nitto.co.jp)

NO.660 1/1  
2709-66006-190729\_E

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.