


Composite Adhesive Tape

No.350A

1.Feature

- It has excellent electric insulation and electrolytic corrosion properties.
- It meets the flame-retardant requirements of UL510. (UL recognized flame retardant)
- It also has UL130°C temperature rating.(UL recognized class 130°C)
- UL File Number E-34833

2.Construction

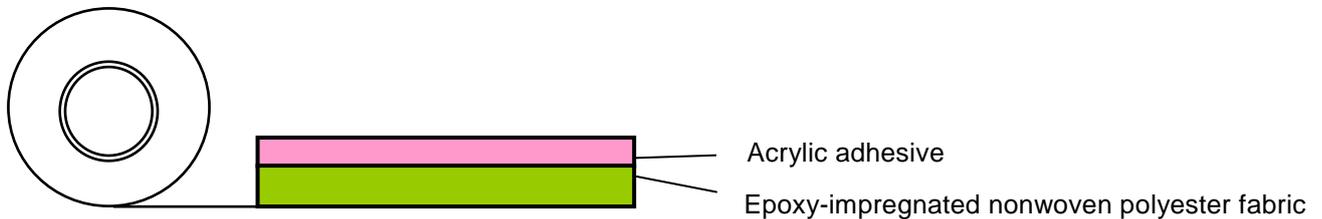

3.Applications

- For barrier to maintain distance between coil and bobbin
- For outer and interlayer insulation

4.Properties

Table1. General properties

Items	Units	No.350A
Total thickness	mm	0.23
Adhesion to steel	N/19mm	12.4
Unwinding force	N/19mm	1.9
Tensile strength	N/19mm	95
Elongation	%	13
Breakdown voltage	kV	13
Electrolytic corrosion coefficient	—	1.00

◆No.350A (UL 510 Flame Retardant temperature rating : 130°C E34833)

Contact : Nitto Shinko Corporation Customer Support Center E-Mail tsc-nsk@nitto.co.jp

NO.350A 1/1
5001-41560-200928_E

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.