


Acetate Adhesive Tape

No.156A

Features

- Acetate cloth base offers more than enough physical strength including tensile strength.
- Offers superior flexibility and excellent sealing.
- UL-certified , flame-retardant adhesive tape.(UL file number E-34833)

Construction

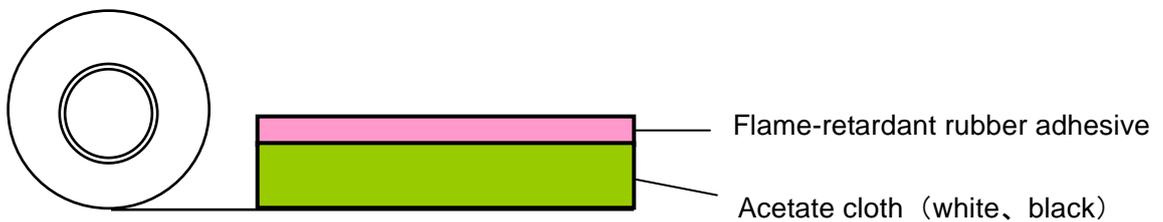

Applications

- Termination and outer insulation on transformers and coils.
- Electrical insulation protection and banding of wire harnesses.,

Properties

Items	Units	No.156A
Total Thickness	mm	0.25
Adhesion to Steel	N/19mm	9.0
Unwinding force	N/19mm	4.0
Tensile Strength	N/19mm	137
Elongation	%	23
Breakdown Voltage	kV	2.1
Electrolytic Corrosion Coefficient	—	0.96
Flame retardant	—	UL recognized flame retardant

Contact : Nitto Shinko Corporation Customer Support Center E-Mail tsc-nsk@nitto.co.jp

NO.156A 1/1
5001-41320-131101_E

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.