


## SPV 5057DD5 - SPV 5057DD7

### General description

SPV 5057DD5 and SPV 5057DD7 are surface protection tapes suitable to protect high gloss and smooth brushed metals during light mechanical processes. These tapes consist of a blue transparent PE film coated with a pressure sensitive "easy-peel" acrylic based adhesive.

### Construction




- Pressure sensitive acrylic-based "easy peel" adhesive
- Blue transparent PE film

### Characteristics

These products protect the substrate during processing against scratches and impurities. The tapes are available in 2 different adhesion levels: medium (DD5) – high (DD7). Both adhesives have a good humidity resistance. The 'easy peel' behaviour of the adhesives show a low unwind and tension during lamination process. The peeling force will decrease in function of the removal speed.

The use of SPV 5057DD5 and SPV 5057DD7 in these processes give the advantage of substantial reduction of lubricants and cleaning handlings, resulting in lower operational costs.

The transparency of these tapes allow easy identification and inspection of the protected substrates.

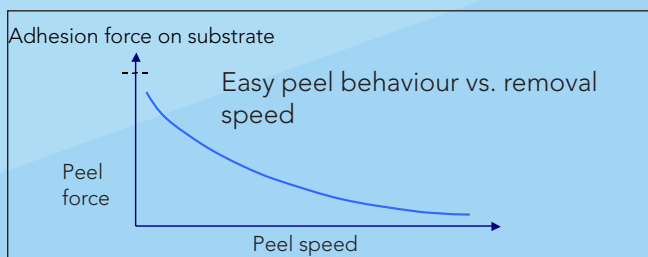

### Application

SPV 5057DD5 and SPV 5057DD7 are surface protection tapes suitable to protect high gloss and smooth brushed metals such as aluminium and stainless steel during light mechanical processes.

The use of these tapes make it possible to process the protected surfaces with a selected medium or high adhesion level.

## CORE FUNCTION



## TO PROTECT

### Features

- special "easy-peel" adhesive
- zipper effect during peel off
- very low unwind
- high adhesion level
- for protection of high gloss and smooth brushed metals
- good humidity resistance
- substrate identification and inspection
- recyclable



Edition: January 2019  
Code: DS/12.07/A5 SPV 5057DD5-7 ENG  
This datasheet replaces all previous versions



## Properties

	DD5	DD7	Test Method
Film Type	PE film	PE film	
Adhesive type	Acrylic-based	Acrylic-based	
Total Thickness	50 µm	50 µm	EN 1942
Adhesion on BA steel	70 cN/20 mm	150 cN/20 mm	EN 1939
Tensile strength MD**	22 N/20 mm	22 N/20 mm	EN 14410
Weatherability on BA steel*	75h	75h	ISO 4892-2
Elongation MD*	250 %	250 %	EN 14410
Colour	Blue transparent	Blue transparent	
Transport and storage conditions	Temperature 15 to 30 °C Relative humidity 40 to 75% RH		

\* The weatherability is measured on BA steel. Depending on the substrate the weatherability performance can be different.

\*\* MD = Machine Direction

Details from the test methods are described on the customer product specification.

CAUTION: The above are typical values and should not be used in writing specifications.

## Warranty

The product is guaranteed to be free from defect in material and workmanship at the time of delivery and will be suitable for use for a period of 6 months thereafter, subject to the conditions set out herein.

## Availability

Widths: 1000 mm, 1250 mm, 1500 mm and 2500 mm    Lengths: 500 m and 1000 m  
Please contact us for specific dimensions

## Lamination guidelines

- The tapes should be applied to a clean and dry surface by automatic mechanical means.
- In order to avoid entrapped air-bubbles, excessive tension and shear, the customer should determine appropriate lamination conditions.
- The best lamination conditions are obtained at a temperature between 15 °C and 40 °C.

## Application guidelines

- In general, these tapes are immediately usable for further processing after lamination.
- Longer storage time of applied material should be avoided due to increase of adhesion.
- SPV 5057DD5 and SPV 5057DD7 are not designed for prolonged outside exposure.
- These tapes are not meant for permanent protection, it is advisable to remove the tape after the mechanical processes.

General conditions of use and precautions:  
The properties of the product might be adversely affected by various elements such as composition, condition and surface of and impurities in or on the substrate, temperature and humidity during storage, the surrounding environment at and after application and time of exterior use. When the product is used in combination with another material or process, the user shall assure the compatibility of the product in such combination and whether this combination results in the expected performance. The same principle applies in the event of product use in extreme conditions or circumstances, whether at or after the moment of application, including extended exposure to sunlight or extreme temperatures and pressure.

Packaging, transport and storage:  
During transport and storage the product should always be protected against direct sunlight and extremes in temperature and humidity and contained in its original packaging. Once removed from its packaging, it should be promptly applied and remain shielded from direct sunlight and extreme temperature as well as protected against dust and other impurities.

### Liability:

Except for its wilful misconduct, Nitto Belgium's liability shall be limited to a replacement, a reimbursement or an additional delivery of the product, and shall not exceed the purchase price of the products. In no event shall Nitto be liable in respect of any indirect or consequential damages, including loss of profits.

The above limitations of liability shall equally apply if Nitto Belgium has assisted in any manner with the selection, treatment or application of the product.

### Product information:

This datasheet provides a general description of the product properties and application scope. Full technical details in connection with this product are presented in the customer product specification, which is available upon request.

The information reflected in this datasheet is subject to change and the product described herein may be modified or discontinued without notice.

Nitto Belgium NV has obtained following certificates:

- ISO 9001
- ISO 14001
- IATF 16949

Please check our website for applicable scope

If you require additional information on technical properties and application as well as product sampling or testing, please contact your local Nitto sales office.

Edition: January 2019  
Code: DS/12.07/A5 SPV 5057DD5-7 ENG  
This datasheet replaces all previous versions