


Flame-retardant Nomex[®] adhesive tape

No.386UL

1.Features

- Excellent heatproof property.
- Flame-retardant requirements of UL-510. (UL recognized flame retardant)
- Excellent electric insulation property.
- Base material is 2mils and 3mils.

2. Construction

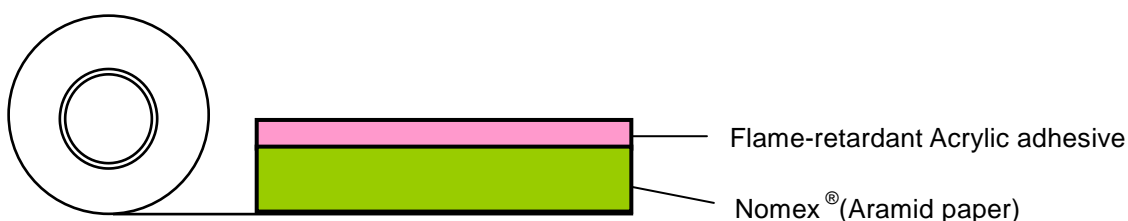

Nomex[®] is a registered trade name of Du Pont

3.Applications

- Interlaminar insulation of transformers
- End turn bundling and outer insulation for coils
- Heat-resistant electrical tape for insulation

4.Properties

Table 1 . General properties

Items	Units	2mils	3mils
Total Thickness	mm	0.12	0.14
Adhesion to Steel	N/19mm	7.3	6.8
Tensile Strength*1	N/19mm	85	136
Elongation*1	%	10	14
Breakdown Voltage	kV	2.6	3.3

Footnote : *1 at Breaking

Contact : Nitto Shinko Corporation Customer Support Center E-Mail tsc-nsk@nitto.co.jp

NO.386UL 1/1
5001-27220-131001_E

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.