


Vinyl adhesive tape

NO.21TOKUHABA

Constitution

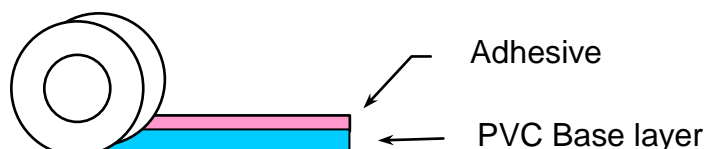

Test method

According to JIS C 2107

Feature

- It's easy to tear by hands, and good workability.
- The tapes are with good performance of wrapping and firmness.
- The ingredient of heavy metal comply with the directive of RoHS and ELV.

Standard size

| Thickness (mm) | Width (mm) | Length (m) | Color |
|-------------------|---------------|---------------|--|
| 0.2 | 38・50 | 10・20 | black・white・blue・red・yellow・green・gray・brown・ ivory・transparent |

※Except for other standards, please consult with us.

Doc No.PVC-005-E-3 2013/09/17 1/2

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

Characteristic

| Item | | Unit | NO.21TOKUHABA |
|-----------------------|----------------------|---|------------------------------|
| 180° Adhesion trength | to stainless steel | N/19mm (gf/19mm) | 3.42 349 |
| | to backing | N/19mm (gf/19mm) | 3.04 310 |
| Unwinding force | low speed (0.3m/min) | N/19mm (gf/19mm) | 4.36 445 |
| | high speed (30m/min) | N/19mm (gf/19mm) | 10.1 1030 |
| Elongation | | % | 222 |
| Tensile strength | | N/19mm (kgf/19mm) | 64.7 6.6 |
| Volume resistivity | | $\Omega \cdot \text{cm}$ (log $\Omega \cdot \text{cm}$) | 2.5×10^{13} 13.4 |

Precautions

- Remove oil, moisture and dust from the tape surface to which the tape is applied to obtain sufficient adhesion.
- If the air temperature is low especially in winter, the adhesive strength may reduce. Please be careful for the conditions.
- Store the tape indoors as delivery-packed at normal temperature and normal humidity where direct sunlight does not affect.
- This product has probability of forming telescope(each wound layer of the tape is slid and deformed like bowl or dish).