


Adhesive transfer tape

No.591

Outline

Nitto Denko No.591 is 0.05mm thick adhesive transfer with acrylic adhesive for bonding of various plastics such as nameplate.

Structure

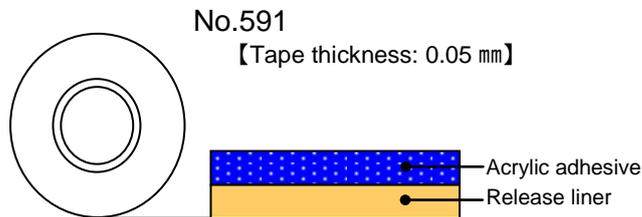

Features

- Base-less and uniform adhesive layer can minimize burr and oozing at punching nameplate.
- Excellent adhesion to plastics.

Applications

- Bonding of metal, plastic and nameplate.
- For general bonding

Standard Sizes

Tape thickness (mm)	Widths (mm)	Lengths (M)
0.05	10 ~ 1200	50, 100

For more information, please contact us.

No. 591 10-P-0016_E (1/3)

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

Properties

● 180° peeling adhesion by substrates


Substrate	No. 591
Stainless steel plate	6.5
Aluminum plate	6.2
ABS plate	6.0
Acrylic plate	6.8
Polyester plate	6.4

(Unit: N/20 mm)
 Peeling speed: 300 mm/min
 Peeling angle: 180°
 Measurement condition: 23°C, 50% RH

● Holding power

Substrate	No. 591
Phenol resin plate	0.4

(Unit: mm/hr)
 Application area: 10 mm x 20 mm
 Backing: PET#25
 Load: 4.9N
 Measurement temperature: 40°C

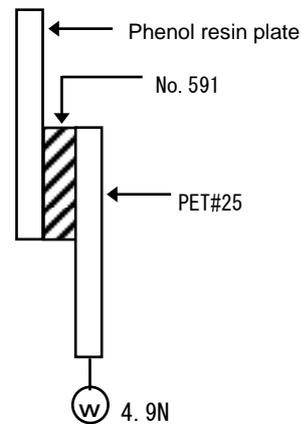

● Shear strength

Substrate	No. 591
Stainless steel plate / Stainless steel plate	420

(Unit: N/20 mm x20 mm)
 Substrate: Stainless steel plate / Stainless steel plate
 Application area: 20 mm x 20 mm
 Measurement condition: 23°C, 50% RH
 Peeling speed: 50 mm/min

No. 591 10-P-0016_E (2/3)

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

Precautions when using

- Remove all oil, moisture and dirt from the surface of the substrate before applying.
- The tape employs pressure-sensitive adhesive. Be sure to apply pressure with a roller or press when applying. Failure to do so could affect properties or appearance.
- The tape may not adhere well to significantly uneven or distorted surfaces. Level off the surface as much as possible before applying.
- Because it is very thin, you should avoid applying large loads for at least several hours following application.

Precautions when storing

- Be sure to keep the tape in its box when not using.
- Keep in a cool dark place not exposed to direct sunlight.

Safety precautions

	WARNING
<ul style="list-style-type: none">● Make sure the product is suitable for the application (objective and conditions) before attempting to use. The tape may come off depending on the substrate to which it is applied or conditions under which it is applied.● Use in combination with another method of joining if there is possibility of an accident.	

Published in October 2013

No. 591 10-P-0016_E (3/3)

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.