


Flame-retardant polyester adhesive tape NO3161FR2

Features

- Offers superior electrical insulation
- Offers superior flame proofness UL-510 Flame retardant certified
- Offers superior heat resistance Max operating temperature: 130degC UL-510 certified
(Temperature rating 130 degC)
- Contains no PBB and PBDE, which are the target of the regulation of RoHS

Structure

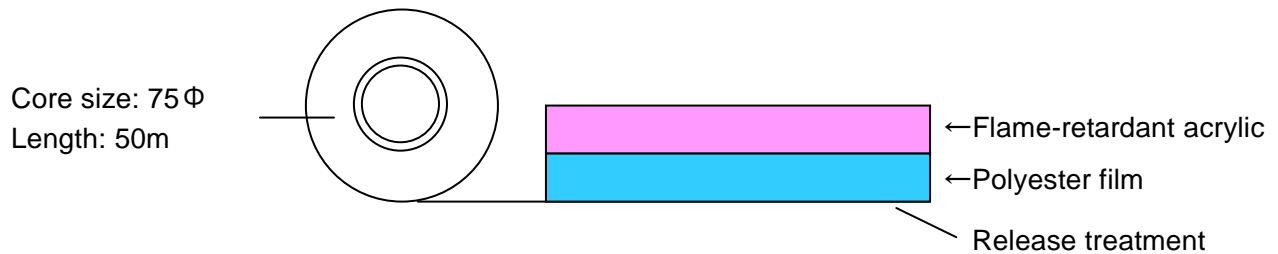

Applications

- Electrical insulation of power transformers

Properties

Table 1. General Properties

Item	Unit	NO3161FR2
Total Thickness (Backing)	mm	0.082 (0.050)
Color	—	Milky
Peel adhesion	N/19mm	8.7
Tensile strength	N/19mm	210
Elongation	%	140
Breakdown Voltage	kv	13.6
Electrolytic corrosion factor		1.0

-For inquiries ... Technical Support Center, Electronics Device Materials Group T-COW
E-mail: tcow@nitto.co.jp TEL: 81-532-41-7559 FAX: 81-532-41-8446

NO3161FR2 1/1
262-30598E-161124

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.