

Glass-cloth adhesive tape **NO.188UL**

Features

- Offers superior mechanical strength and electrical insulation
- Offers superior heat resistance (Continuous use temperature 180°C)
- Certified under UL510A standard for flame retardant (E34833).

Structure

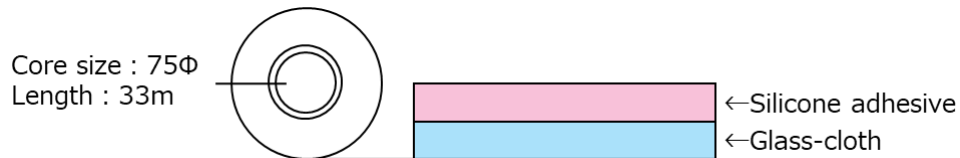


Fig.1 Structure

Applications

- Electrical insulation of transformers and coils
- Covering of parts

Properties

Table.1 General properties

Property	Unit	Characteristic value
Total thickness (Backing)	mm	0.180 (0.130)
Color	-	White
Peel adhesion	N/19mm	6.7
Tensile strength	N/19mm	600
Elongation	%	7
Breakdown voltage	kV	3.5
Electrolytic corrosion factor	-	0.96