


Self-Fusing Silicone Rubber Tape

No.66

Features

- Excellent heat and weather resistance

Construction

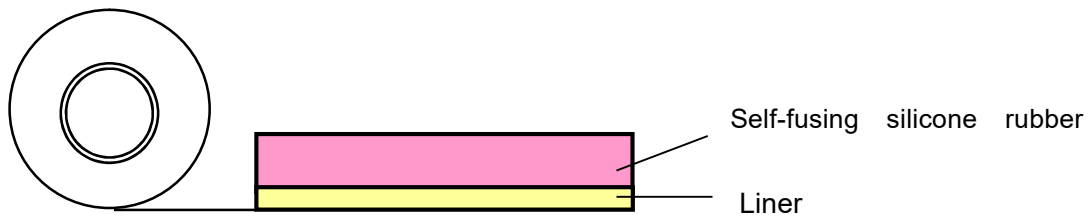

Applications

- For protecting electric cable joint insulation

Properties

Table1. General properties

Items	Unit	Thickness(mm)			
		0.18	0.25	0.30	0.50
Width	mm	19			
Length	m	15			
Tensile strength	MPa	6.6	6.9	7.2	8.0
Elongation	%	652	645	658	664
Breakdown voltage	kV/mm	58.6	53.7	53.1	46.9
Fusion Strength	N/19mm	24.6	34.2	38.3	57.2

Contact : Nitto Shinko Corporation Customer Support Center E-Mail tsc-nsk@nitto.co.jp

NO.66 1/1

2709-66456-210312_E

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.