


## Composite Adhesive Tape

# No.341F

### 1.Features

- It excels in flexibility, and the adhesion to coils is excellent.
- Adhesive performance improves by heat-treatment.

### 2.Structure

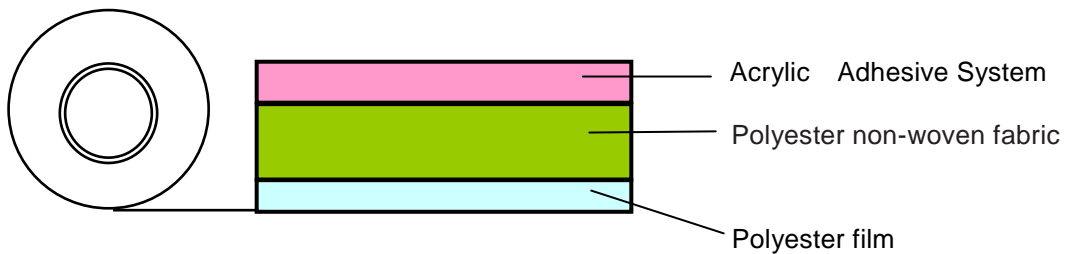

### 3.Application

- Outer insulation and terminating of coils

### 4.Properties

Table 1 General Properties

Items	Unit	Values
Total Thickness	mm	0.42
Thickness of non-woven fabric	mm	0.35
Color	mm	White/Blue
Adhesion strength	N/19mm	6.8
Tensile strength	N/19mm	128
Elongation	%	58
Break down voltage	kV	5.5
Electrolytic Corrosion Coefficient	-	0.99

Contact : Nitto Shinko Corporation Customer Support Center E-Mail [tsc-nsk@nitto.co.jp](mailto:tsc-nsk@nitto.co.jp)

NO.341F 1/1  
5001-41558-150128\_E

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.