

# Polyimide adhesive tape NO.360UL

## Features

- Offers superior electrical insulation.
- Offers superior heat resistance. (Continuous use temp. 200°C)
- Certified under UL510A standard for flame retardant (E34833).

## Structure

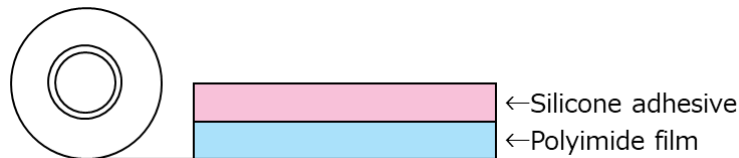


Fig.1 Structure

## Applications

- Electrical insulation and heat resistance.

## Properties

Table.1 General properties

Property	Unit	Characteristic value	
Total thickness (Backing)	mm	0.055 (0.025)	0.080 (0.050)
Color	-	Amber	
Peeling strength (Substrate: SUS)	N/19mm	4.1	4.8
Tensile strength	N/19mm	115	250
Elongation	%	44	55
Breakdown voltage	kV	8.0	11.0
Continuous use temp.	°C	-60~200	