


Composite adhesive tape

No. 354R

1. Features

- It has excellent electrical insulation and corrosion resistance.
- Excellent heat resistance.
- Excellent flame resistance. (UL 510A FR certified)

2. Composition

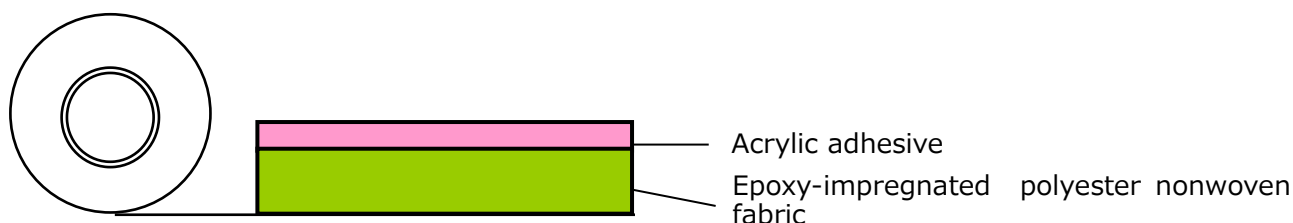

3. Uses

- Terminal insulation and interlayer insulation of transformers
- Terminal fastening and external insulation for various coils

4. Features

Table 1: General Characteristics

Item	Unit	Measured values
Thickness	mm	0.15
Adhesive strength	N/19mm	11.2
Rewinding force	N/19mm	1.9
Tensile strength	N/19mm	105
Elongation	%	17
Dielectric breakdown voltage	k V	9.0
Corrosion coefficient	—	1.00

Contact: Nitto Shinko Corporation Customer Support Center E-Mail tsc-nsk@nitto.co.jp

NO.354R 1/1
5001-41565-260526_E

Note: The data provided here are examples of measured values and are not guaranteed values. Furthermore, we do not guarantee the suitability of this product for the applications described in this document.

Before use, please verify compatibility with this product and carefully consider its suitability for your intended application. Please note that copyright and other rights pertaining to the content of this document are owned by our company. Unauthorized copying, reproduction, or use for purposes other than those intended is strictly prohibited. If you have any questions, please contact the office listed at the end of this document.

日東シンコー株式会社