


Acetate Adhesive Tape

No.153

1.Features

- No.153 is acetate cloth tape with acrylic strong adhesive applied to an acetate cloth. It is suitable for banding of wire harnesses and airbags.

2.Construction

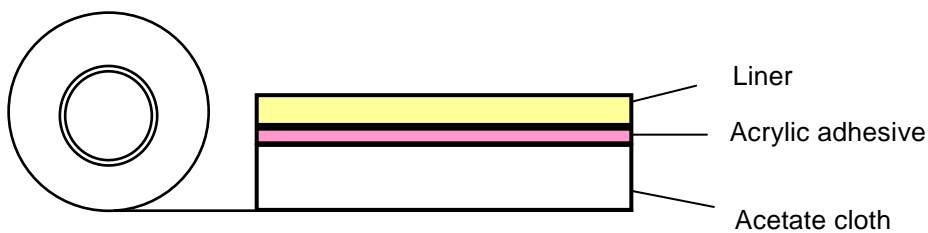

3.Properties

Items	Unites	Values
Total Thickness (Backing)	mm	0.21 (0.18)
Color	—	White, Black
Adhesion	N/15mm	9.5
Adhesion to backing	N/15mm	9.8
Tensile Strength	N/15mm	100.4
Elongation	%	24.4

※Measuring method

- 1.Total Thickness: Measure with a dial gauge (1/1000mm).
- 2.Adhesion: Apply a test piece to a stainless plate (adherend) by reciprocating a 2 kg roller once at 5 mm/s. Peel off the test piece at a tensile speed of 300 mm/min and an angle of 180 degrees.
- 3.Adhesion to backing: Apply a test piece to backing (adherend) by reciprocating a 2 kg roller once at 5 mm/s. Peel off the test piece at a tensile speed of 300 mm/min and an angle of 180 degrees.
- 4.Tensil Strength, Elongation: Measure tensile strength at a tensile speed of 300 mm/min and a clamp distance of 100 mm.

Contact : Nitto Shinko Corporation Customer Support Center E-Mail tsc-nsk@nitto.co.jp

NO.153 1/1
5001-61254-131101_E

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.