


## Acetate Adhesive Tape

# No.156A

### Features

- Acetate cloth base offers more than enough physical strength including tensile strength.
- Offers superior flexibility and excellent sealing.
- UL-certified , flame-retardant adhesive tape.(UL file number E-34833)

### Construction

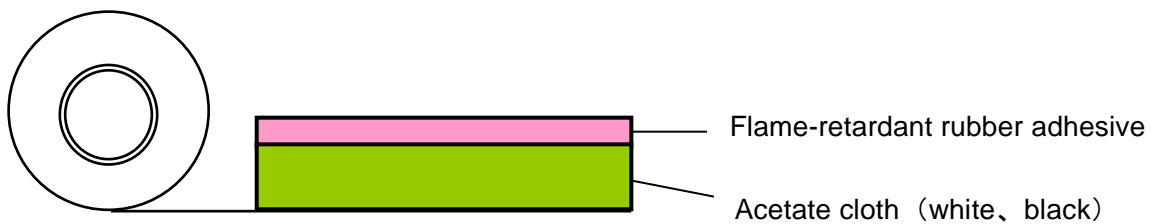

### Applications

- Termination and outer insulation on transformers and coils.
- Electrical insulation protection and banding of wire harnesses.,

### Properties

Items	Units	No.156A
Total Thickness	mm	0.25
Adhesion to Steel	N/19mm	9.0
Unwinding force	N/19mm	4.0
Tensile Strength	N/19mm	137
Elongation	%	23
Breakdown Voltage	kV	2.1
Electrolytic Corrosion Coefficient	—	0.96
Flame retardant	—	UL510A FR · E34833

Contact : Nitto Shinko Corporation Customer Support Center E-Mail [tsc-nsk@nitto.co.jp](mailto:tsc-nsk@nitto.co.jp)

NO.156A 1/1  
5001-41320-260217\_E

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.