

SCF (Super Clean Foam)

# SCF100/SCF101/SCF102/SCF103/ SCF104/SCF106/SCF120/SCF150

## Outline

---

SCF100 series are polypropylene foam materials with or without adhesive, which can be used as dust-proof, buffer, and shock absorber materials.

Their application is mainly for display gasket of electric appliances, communication equipments and other electronic equipments.

## Construction

---

◆ SCF100		← Polypropylene foam
◆ SCF101		← Liner ← Acrylic adhesive (Backing: PET #50) ← Polypropylene foam
◆ SCF102		← Liner ← Acrylic adhesive (Backing: PET #25) ← Polypropylene foam
◆ SCF103		← Liner ← Acrylic adhesive (Backing: PET #100) ← Polypropylene foam
◆ SCF104		← Liner ← Acrylic adhesive (Backing: Nonwoven cloth) ← Polypropylene foam
◆ SCF106		← Liner ← Acrylic adhesive (Backing: PET #4) ← Polypropylene foam

Doc No. SCF-001-E-5 2022/05/27 1/4

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.



## Features

- The environment impact material is not used.
- Easy to compress.
- Thanks to their low compression stress, they will not deform the structures after application.
- They show excellent conformability to gaps with bumps or curved surfaces.
- They have almost no impurities, which might contaminate the equipments
- Due to the stiffness secured by their unique micro-cell structure, they show excellent process ability and workability.

## Application

- Electric appliances, electronic equipments: Dust-proof display gasket and lens buffer for digital camera and digital video recorder.
- Communication equipment: Dust-proof display gasket and camera lens buffer for mobile phone.

## Standard Size

Table-1

Thickness (mm)	Width (mm)	Length (M)
0.5~1.0 Received in unit of 0.1mm	500 only SCF106 : 480 SCF120 : 450	100

\*The thickness is only foam's thickness; the combined should add the thickness of each adhesive tape.

\*For other sizes, please contact us.

Doc No. SCF-001-E-5 2022/05/27 2/4

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.


## Properties

### ● Properties of Foam

#### (1) General Properties

Table -2

Property	Unit	Values	Test method
Density	g/cm <sup>3</sup>	0.045	JIS K 6767
50% Compression Load	N/cm <sup>2</sup>	1.4	

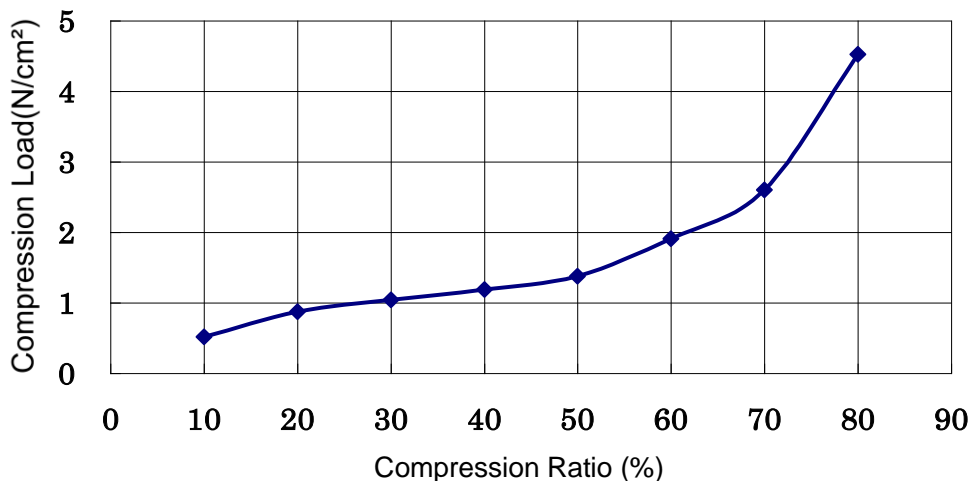

#### (3) Dimension Stability

Table -3

		Storage condition (85°C)		
		250hr	500hr	1000hr
SCF100	MD	-0.4%	-0.7%	-0.2%
	TD	-0.4%	-0.6%	-0.1%

Change of dimension ratio (%)=(A-B)/A x 100  
 A=initial dimension  
 B=dimension after storage

#### (4) Out gassing

◇ Result of analysis of generated organic gases

Table -4

	Unit	Toluene	Others	Total
100°C x 60min	ng/cm <sup>2</sup>	1.8	3.0	4.8

Toluene conversion value

Doc No. SCF-001-E-5 2022/05/27 3/4

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

◇ Result of analysis of generated inorganic gases

Table -5

	Unit	Cl <sup>-</sup>	NO <sub>2</sub> <sup>-</sup>	NO <sub>3</sub> <sup>-</sup>	PO <sub>4</sub> <sup>3-</sup>	SO <sub>4</sub> <sup>2-</sup>	NH <sub>4</sub> <sup>+</sup>
100°C x 60min	ng/cm <sup>2</sup>	<4.8	<6.9	<11	<29	<12	<1.4

◇ Result of analysis of hot water extraction ion components

Table -6

	Unit	Cl <sup>-</sup>	NO <sub>2</sub> <sup>-</sup>	NO <sub>3</sub> <sup>-</sup>	PO <sub>4</sub> <sup>3-</sup>	SO <sub>4</sub> <sup>2-</sup>	NH <sub>4</sub> <sup>+</sup>
100°C x 120min	ng/ cm <sup>2</sup>	33	<8.4	<11	<27	<13	2.7

\*< : Under the limit of detection

● Properties of Adhesive

Table -7

Item	Unit	Substrate	Adhesive strength (90°peeling)
SCF101	N/15mm	SUS304	4.82
SCF102			3.84
SCF103			3.89
SCF104			7.08
SCF106			4.83

## Precautions

---

- Place the products longitudinally to avoid deformation.
- Keep the products away from high temperatures and humidity, and store them in a dark cool place avoiding direct sunlight.
- As the adhesive is pressure-sensitive, attention should be paid to the lamination pressure.
- You should perform the test yourself to make sure the product is capable of the application.

Doc No. SCF-001-E-5 2022/05/27 4/4

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.